


- Özel alaşımlı çelikten mamül
- Sertleştirilmiş ve taşlanmış (h8)
- Gerilim direnci 1040 N / mm²
- Esneme % 9 (min.)

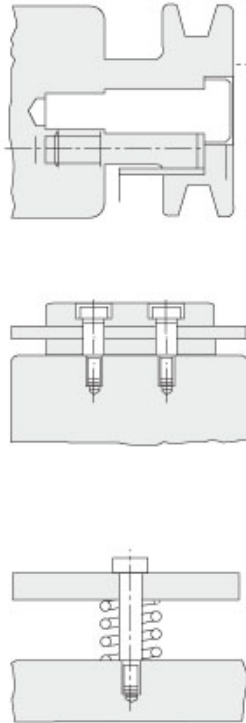

SİPARİŞ ŞEKLİ: d2 x L

d1	6	8	10	12	16	20	24
d2	M5 x 0,8	M6 x 1	M8 x 1,25	M10 x 1,5	M12 x 1,75	M16 x 2	M20 x 2,5
dk max	10	13	16	18	24	30	36
K max	4.5	5.5	7	9	11	14	16
b	9.5	11	13	16	18	22	27
s	3	4	5	6	8	10	12
L	10						
	12						
	15						
	16						
	20						
	25						
	30						
	35						
	40						
	45						
	50						
	55						
	60						
65							
70							
80							
90							
100							
120							

STANDART ÜRETİM / STOKLARIMIZ

ÖZEL ÖLÇÜYE GÖRE ÜRETİLİR.